

• Scanner Central Admin Software for Fleet Management



fi-7160 & fi-7260

Designed for workflow efficiency and built to last, the Fujitsu fi-7160 and fi-7260 scanners offer exceptional return on investment (ROI) through increased scanning speeds and reduced operator intervention.

Scanning Performance

With duplex scanning speeds of 120 images per minute at 300 dpi in Color, Grayscale, and Monochrome, the fi-7160 and fi-7260 protect your documents with acoustic sensors, ensure your data is captured with smart ultrasonic technology, and reduce rescans by cleaning up documents automatically in a single pass. Reliability is enhanced even further with new skew prevention technology for exceptional paper handling.

- Rapid power up time in less than 4 seconds.
- · Hard and embossed credit card scanning up to 1.4mm thick
- · Scan sticky notes, taped receipts, and labels while securing against multifeeds
- Long document support up to 18.3 feet in PaperStream IP
- · Latest USB 3.0 for forward compatibility
- 32/64 Bit Driver for PaperStream IP (TWAIN & ISIS)

Fleet Management

Bundled with fi-7160 and fi-7260, the Scanner Central Admin provides IT departments an efficient way to manage medium to large scanner deployments. With remotely

accessible fleet information, IT departments can now allocate resources effectively based on scan volume, consumable wear, depreciation schedules and maintenance expiration.



Included with Scanner

Fujitsu fi-7160 and fi-7260 scanners have everything needed to integrate with thousands of software applications in the market or with PaperStream Capture, an advanced yet easy to use scanning application provided in the box.

- PaperStream IP Image Cleanup (TWAIN & ISIS)
- PaperStream Capture batch scanning and PDF creation software
- · One-year Advance Exchange Limited Warranty

Accessories & Options

The following options are available for purchase:

- . Training & Installation to get the most out of the equipment
- Advanced Exchange Warranties in multi-year bundles
- ScanAid Kit with consumables and cleaning supplies
- fi-7160 Post-Imprinter for backside endorsing
- Black Background for fi-7260 flatbed auto-cropping
- · Carrier Sheet for double letter stitching

For full details on the Limited Warranty and other service programs, please go to www.lmagingService.com or call (800) 626-4686.











100	p 00						
Models			fi-7160 (ADF only) / fi-7260 (ADF+Flatbed)				
Image Sensor Type			Color CCDs (Color Charge Coupled Device)				
Light Source			White LED Array				
Optical Resolution			600 dpi				
Color (24 bit)			(24 hit)	50 to 600 dpi, 1200 dpi ²			
Output Grayscale		cale (8 bit)					
Monochrome			Color: 94 hit. Craycoolo: 9 hit. Manachroma: 1 hit				
Output Color Depth				Color: 24-bit; Grayscale: 8-bit; Monochrome: 1-bit			
Internal Video Processing				65536 levels (16-bit)			
Image Processing Function				Hardware Software	Deskew, cropping Multi-image, Blank page skip, i-DTC, Advanced-DTC, Simplified-DTC, sRGB, Auto color, Deskew cropping, Punch hole removal, Tab cropping, Upper lower separation, Error diffusion, Dither, Moire removal, Image Emphasis, Color cleanup, Dropout color (None, Specified, Color Saturation), Edge repair, Vertical Streaks Reduction		
Performance				Eago repail, vertical officians reduction			
0-14						Simplex: 60 ppm, Duplex: 120 ipm	
Scanning Sp			or ⁴ , lyscale ⁴ , nochrome	ADF		(200dpi/300 dpi)	
(A4, Portrait)	3			Flatbed (fi-	7260)	1.7 seconds (200 dpi)	
ADF Canacit	ADF Capacity 5			,			
· · ·			80 Sheets (Letter 20 lb. or A4: 80 g/m²) 2 x 2.13 in. (50.8 x 54 mm)				
Document		ADF minimum					
Document size		ADF maximum ⁶		8.5 x 14 in. (216 x 355.6 mm)			
SIZO		Long document		8.27 x 220 in. (18.3') (210 x 5,588 mm) ⁷			
	Flat	Flatbed (fi-7260)		8.5 x 11.69 in. (216 x 297 mm)			
ADF Feeding			ter	7.2 to 110 lb. (27 to 413 g/m²)			
Paper Weigh			sheets	34 to 56 lb. (127 to 209 g/m²)			
(Thickness)		Card 8		Up to 1.4 mm (portrait / landscape) ⁹			
Interface				USB 3.0 (backward compatible)			
Physical Specifications							
Power requirements				100 to 240VAC ±10%			
Power consu			fi-7160	38 W or less (Sleep: 1.8 W; Standby: 0.35 W) ¹⁰			
(Operating)	ınpu	UII	fi-7260	41 W or less (Sleep: 1.8 W; Standby: 0.35 W) 10			
Dimensions			fi-7160	11.8 x 6.7 x 6.4 in. (300 x 170 x 163 mm)			
(WxDxH) 11 fi-7260				11.8 x 22.7 x 9.2 in. (300 x 577 x 234 mm)			
fi-7160			9.26 lb. (4.2 kg)				
Weight			fi-7160	19.4 lb. (8.8 kg)			
Environmental compatibility 12			ENERGY STAR® / RoHS / EPEAT Silver				
Operating	_	Temperature		42° to 95° F (5° to 35° C)			
Environment	Re	Relative humidity		20% to 80% (non-condensing)			
Inbox Contents				ADF paper chute, AC cable, AC adapter, USB cable, Setup DVD-ROM, Getting Started Guide			
Bundled Software				PaperStream IP (TWAIN/ISIS) Driver, Software Operation Panel, Error Recovery Guide, PaperStream Capture, ScanSnap Manager for fi Series, Scan to Microsoft SharePoint, ABBYY FineReader for ScanSnap, Scanner Central Admin Agent.			
Options				Post-scan Imprinter (fi-7160 only), Carrier Sheet, Black Document Pad (fi-7260 only)			
OS Support				Windows® 8 (32-bit/64-bit), Windows® 7 (32-bit/64-bit), Windows Vista® (32-bit/64-bit), Windows XP® (32-bit/64-bit), Windows Server® 2008 (32-bit/64-bit), Windows Server® 2012 (64-bit)			
Feed Detection Features				Ultrasonic Double Feed Detection Sensor, Acoustic Paper Protection Sensor, Intelligent Multi-Feed Function (Manual Bypass)			
Other Features				Embossed Card Scanning Capability, Long Document Scanning, Scanner Central Admin management, USB 3.0 Support, Acoustic Paper Protection, Automatic: Color Recognition, Paper-Size Detection, De-skew Correction			
Limited Warranty				One-year. Advance Exchange program also available; restrictions apply. For full details, visit www.lmagingService.com or call (800) 626-4686.			
Service Options				Post-Warranty: Advance Exchange Plus; restrictions apply. Consumables: ScanAid™ kit. For full details, visit www.lmagingService.com or call (800) 626-4686			
Dort Number			fi-7160	PA03670-B055			

1 Maximum output resolutions may vary, depending upon the size of the area being scanned and whether the scanner is scanning in simplex or duplex. 2 Scanning limitations brought about by scanning mode, document size and available memory may occur when scanning at high resolutions (600dp or higher). 3 Actual scanning speeds are affected by data transmission and software processing times. 4 JPEG compressed figures. 5 Maximum capacity varies, depending upon paper weight. 6 Document sizes larger than A4, but not exceeding A3, can be scanned (single-side) using an optional carrier sheet. 7 The scanning of documents that exceed 34 inches in length will be limited to using PaperStream IP at 200 dpi or less, 300 dpi is 215 inches. 8 Supports ISO7810 embossed cards. 9 Capable of scanning by 0 3 cards at a time. (Note: does not support multi-embossed card feeding.) 10 fi-7160 only. 11 Excluding the ADF paper chute and stacker. 12 PFU Limited, a Fujitsu company, has determined that this product meets RoHS requirements (2002/95/EC).



Part Number

fi-7260

Technical Specifications



PA03670-B555

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. This product is a green product and Fujitsu promotes recycling for the scanner. Users are solely responsible for how they use this scanner. It is imperative that users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

Fujitsu Computer Products of America, Inc. 1250 East Arques Avenue Sunnyvale, CA 94085-4701 (800) 626-4686 (408) 746-6000 • info@fcpa.fujitsu.com • http://us.fujitsu.com/fcpa







• Advanced PaperStream Capture Software

• Scanner Central Admin Software for Fleet Management



fi-7180 & fi-7280

Designed for heavy workloads and built to last, the Fujitsu fi-7180 and fi-7280 scanners offer exceptional return on investment (ROI) through increased scanning speeds and reduced operator intervention.

Scanning Performance

With duplex scanning speeds of 160 images per minute at 300 dpi in Color, Grayscale, and Monochrome, the fi-7180 and fi-7280 protect your documents with acoustic sensors, ensure your data is captured with smart ultrasonic technology, and reduce rescans by cleaning up documents automatically in a single pass. Reliability is enhanced even further with new skew prevention technology for exceptional paper handling.

- Rapid power up time in less than 4 seconds.
- Hard and embossed credit card scanning up to 1.4mm thick
- · Scan sticky notes, taped receipts, and labels while securing against multifeeds
- Long document support up to 18.3 feet in PaperStream IP
- Latest USB 3.0 for forward compatibility
- 32/64 Bit Driver for PaperStream IP (TWAIN & ISIS)

Fleet Management

Bundled with fi-7180 and fi-7280, the Scanner Central Admin provides IT departments an efficient way to manage medium to large scanner deployments. With remotely accessible fleet information, IT departments can now allocate resources effectively based on scan volume, consumable wear,

depreciation schedules and maintenance expiration.



Fujitsu fi-7180 and fi-7280 scanners have everything needed to integrate with thousands

of software applications in the market or with PaperStream Capture, an advanced yet easy to use scanning application provided in the box.

- PaperStream IP Image Cleanup (TWAIN & ISIS)
- 2D Barcode Support
- PaperStream Capture batch scanning and PDF creation software
- · One-year Advance Exchange Limited Warranty

Accessories & Options

The following options are available for purchase:

- Training & Installation to get the most out of the equipment
- Advanced Exchange Warranties in multi-year bundles
- ScanAid Kit with consumables and cleaning supplies
- fi-7180 Post-Imprinter for backside endorsing
- Black Background for fi-7280 flatbed auto-cropping
- · Carrier Sheet for double letter stitching

For full details on the Limited Warranty and other service programs, please go to www.lmagingService.com or call (800) 626-4686.












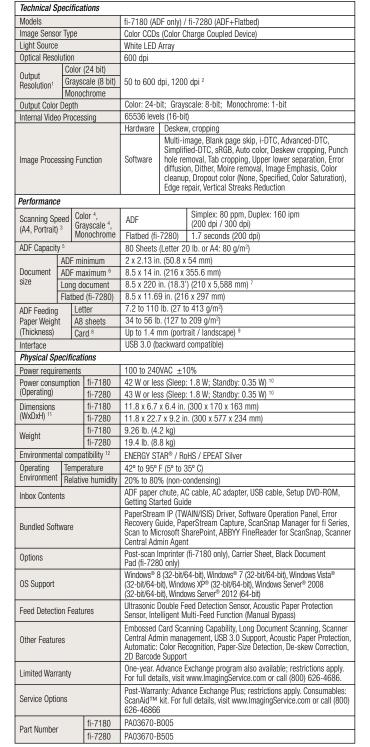

1 Maximum output resolutions may vary, depending upon the size of the area being scanned and whether the scanner is scanning in simplex or duplex. 2 Scanning limitations brought about by scanning mode, document size and available memory may occur when scanning at high resolutions (600dp) or higher, 3 Actual scanning speeds are affected by data transmission and software processing times. 4 JPEG compressed figures. 5 Maximum capacity varies, depending upon paper weight. 6 Document sizes larger than A4, but not exceeding A3, can be scanned (single-side) using an optional carrier sheet. 7 The scanning of documents that exceed 34 inches in length will be limited to using PaperStream IP at 200 dpi or less. 300 dpi is 215 inches. 8 Supports ISO7810 embossed cards. 9 Capable of scanning up to 3 cards at a time. (Note: does not support multi-embossed card feeding.) Under 300 dpi 1.2 mm thickness. 10 fi-7180 only. 11 Excluding the ADF paper chute and stacker. 12 PFU Limited, a Fujitsu company, has determined that this product meets RoHS requirements (2002/95/EC).







This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. This product is a green product and Fujitsu promotes recycling for the scanner. Users are solely responsible for how they use this scanner. It is imperative that users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

Fujitsu Computer Products of America, Inc. 1250 East Arques Avenue Sunnyvale, CA 94085-4701 (800) 626-4686 (408) 746-6000 • info@fcpa.fujitsu.com • http://us.fujitsu.com/fcpa



